



## B&C Plastics Ltd.

767 Mckay Road  
Pickering., Ontario. L1W 3A3  
Tel: (905) 427 - 3324  
Fax: (905) 427 -1548

info@bcplasticsltd.com  
www.bcplasticsltd.com



Document Number: G3000T-SS  
Approved By: Corey Gambon  
corey@bcplasticsltd.com  
Revised: June 1 2012

**B&C Plastics Ltd.**  
1<sup>st</sup> Quality Blowmolders

B&C Plastics Ltd. square jars offer space saving options for many products. A unique look from the more common straight sided round jars.

### Performance Specifications:

Containers are manufactured with virgin high density polyethylene (HDPE) resins which conform to the **Health Protection Branch in Canada** and are in compliance with **The Food and Drug Administration of the United States of America.**

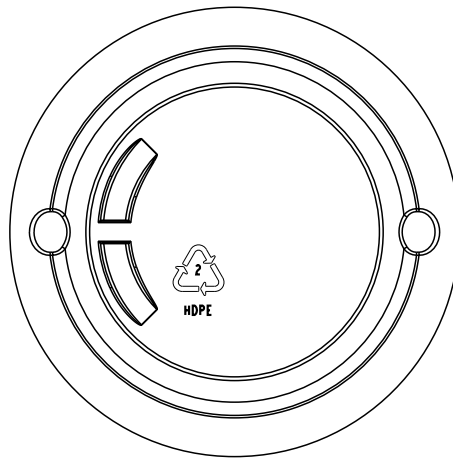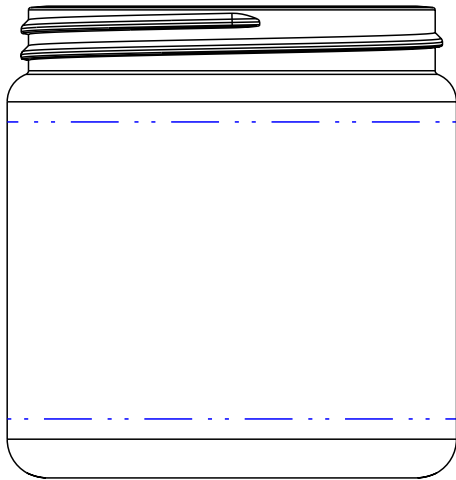

### Dimensions and Weights:

**Rated Capacity:** 10 FL. oz

**Regular Weight:** 28 grams

**Overflow Capacity:** 11 FL. oz

**Medium Duty Weight:** on request

**Height:** 3.660"

**Heavy Duty Weight:** on request

**Diameter:** 2.865"

**Minimum Wall Thickness:** 0.035"

**Label Panel:** 2.700"(H) x 2.90"(D)

**Neck Finish:** M70 SP400

**Note:** Container Dimensions may change according to weight and color.

### Special Features:

**Neck Finish:** 70mm neck finished designed for SP 400 closures.

**Surface Treatment:** Flame Treatment for Silk Screen Application

**Design:** Center opening design provides additional top load strength. Driving Ramps for Label orientation.

### Packaging and Shipping:

Quantity per Case:

396 units

Quantity per trailer 53':

123,552 units

Quantity per Pallet:

4,752 units

Pallets per trailer 53':

26 pallets

Pallet Weight:

133 kgs

### Stock Sku's

Not a stock item.

Custom Runs only. Customer Mold available for resale with approval.

Custom Colors

Minimum Run 25,000 units.

### Custom Options:

PCR at 25 % (minimum required)

Flame Treatment

### Filling Recommendations

- Compatibility of containers with the fill product is sole responsibility of the end user.
- Fill contents should not exceed 70 C ( 158 F ) at time of fill.
- Filled containers should not be stacked and stored above 50 C ( 122 F )

### Notice:

This drawing contains proprietary information of B&C Plastics Ltd. Neither this drawing of its contents may be used, undisclosed to others, or reproduced for any purpose other than that for which it is lent, without the express written permission of B&C Plastics Ltd

© B&C Plastics Ltd. 2010

**10oz Round jar**  
**Mould Number(s): 3000T**